

product description

This model is identical to the EXR-3 with the exception that this unit has an operator arm that extends from the extractor and is manually set. The unit is operated from the inside of the duct.


model EXR-B



product description

This model is identical in construction with the previous units except that the mode of adjustment is with a $\frac{3}{8}$ " square rod (not factory-furnished). Any number of DuroDyne or Young regulator operators may be used on the outside of the duct for proper balancing (not factory-furnished).

model EXR-C

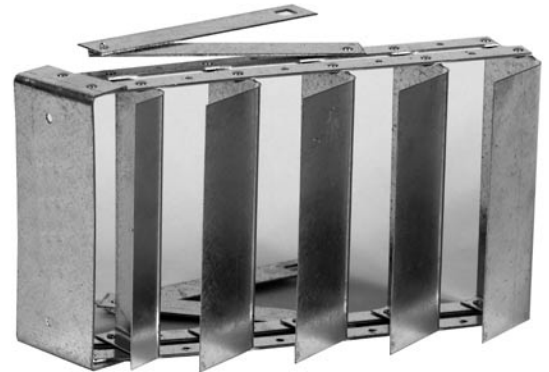

product description

This model is identical in construction to the EXR-B except that a round rod operator is utilized to properly balance the air flow. A Young regulator #950 ball-joint bracket or a DuroDyne #SPR-14 may be utilized (not factory-furnished).

model EXR-R



product description

This butterfly-type damper is utilized on the round neck perforated models or in conjunction with a square-to-round adapter. This is a stamped steel model which attaches directly on the throat of the round fitting in the field. Not to be used on RD-2S or RD-AS round ceiling diffusers.

model BFD

